


For a finger or palm held tool the **0190SV** allows the user exceptionally fine control for close proximity work. This well balanced, low vibration **0190SV** tool is ideal. For polishing at 40,000 rpm or marking or deburring at 65,000, this tool is comfortable and exact. The motor is in the head. There are no gears. Precise and with low vibration. No maintenance or lubrication - ever.

Model 0190SV

0.2 hp
0.15 kW

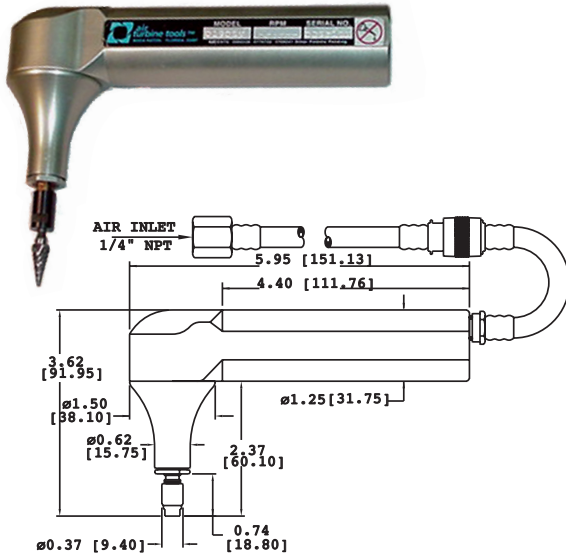

| 1/8" | No Brake | With Brake |
|------------|----------|------------|
| Speed | Part # | Part # |
| 40,000 rpm | 35040 | 35044 |
| 50,000 rpm | 35050 | 35054 |
| 65,000 rpm | 35060 | 35064 |

| 3mm | No Brake | With Brake |
|------------|----------|------------|
| Speed | Part # | Part # |
| 40,000 rpm | 35041 | 35045 |
| 50,000 rpm | 35051 | 35055 |
| 65,000 rpm | 35061 | 35065 |

Weight: 10 oz / .28 kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

| General Specifications | 0190SV | | |
|--------------------------------------|-------------------------|-----------------|----------|
| | CE | MADE IN THE USA | |
| Speed RPM | 40,000 | 50,000 | 65,000 |
| Power Rating HP (KW) | .15 (.11) | .2 (.15) | .2 (.15) |
| Inlet Air Pressure | 90 PSI (6.2 Bar) | | |
| Air Consumption-Idle cfm (L/s) | 3.2 (1.51) | 4 (1.88) | 4 (1.88) |
| Air Consumption-Stall Flow cfm (L/s) | 4.7 (2.22) - 7 (3.30) | | |
| TIR Collet Held Shank | Less than .001" (.03mm) | | |
| Sound Level | Less than 67dBa | | |
| Standard Shank Capacity | 1/8" (3mm) | | |

Accessories

| | Part# |
|-----------------------------|-------|
| Low Flow Filter | 30002 |
| Low Flow Filter / Regulator | 30001 |
| Collet Guard | 30070 |
| Foot Pedal Control | 30030 |

