


For deburring to finishing at a governed constant speed, the **2545SVF** increases production rates and reduces repairs, fatigue and injury. With no gears the **2545SVF** tools have a head angled at 45° for comfort and easy access. The **2545SVF** can perform tasks requiring slower speeds and increased power, such as grinding, deburring and polishing. Standard collet capacities of 1/4" and 6 mm, with several optional collets. These tools are gearless and have no moving parts in the handle. Result - a lighter tool with greater reliability! The **2545SVF** has a front exhaust to help keep the work area clear of debris.

Model 2545SVF

0.45 hp
0.34 kW

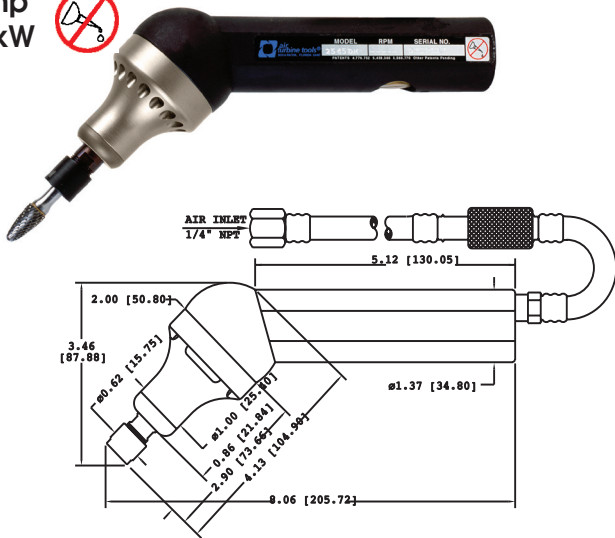

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	35532	35632
40,000 rpm	35542	35642

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	35533	35633
40,000 rpm	35543	35643

Weight: 18 oz / .5 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.
Optional collets page 49.

General Specifications	CE 2545SVF MADE IN THE USA	
	Speed RPM	30,000
Power Rating HP (KW)	.4 (.30)	.45 (.34)
Inlet Air Pressure	90 PSI (6.2 Bar)	
Air Consumption-Idle cfm (L/s)	10 (4.72)	13 (6.14)
Air Consumption-Working cfm (L/s)	11 (5.19) - 20 (9.44)	
TIR Collet Held Shank	Less than .001" (.03mm)	
Sound Level	Less than 67dBa	
Standard Shank Capacity	1/4" (6mm)	

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
Foot Pedal Control	30030

