


Easy to grip, with super low vibration, the **203XDME** removes material with a light touch. Constant governed high speed cuts faster and cleaner with a light touch. No oil mist to clean up or breath and no maintenance are required in the rugged **203XDME**. Super comfortable with a sound level under 67dBa, the **203XDME** cuts operator stress. Less moving parts means less repairs too. Cutting at high speed prolongs cutting tool life and improves finish quality.

Model 203XDME

0.80 hp
0.60kW

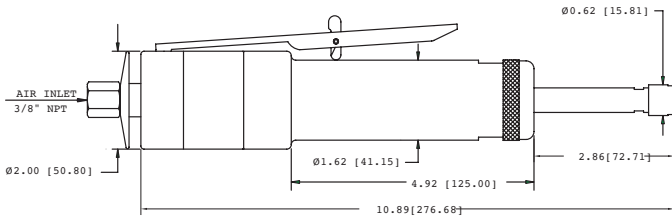


1/4"	
Speed	Part #
30,000 rpm	42854

6mm	
Speed	Part #
30,000 rpm	42855

Weight: 32 oz / .7 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required at rated CFM/LS. Do not use couplings or hoses less than 1/4" / 6mm diameter.

General Specifications	CE 203XDME 
Speed RPM	30,000
Power Rating HP (KW)	0.80 (0.60)
Inlet Air Pressure	90 PSI (6.2 Bar)
Air Consumption-Idle cfm (L/s)	19 (8.94)
Air Consumption-Stall Flow cfm (L/s)	22 (10.38) - 30 (14.16)
TIR Collet Held Shank	Less than .001" (.03mm)
Sound Level	Less than 67dBa
Standard Shank Capacity	1/4" (6mm)

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Foot Pedal Control	30030