


The **201 SV** "pencil" style precision tools are an incredible combination of light weight and high power. At demonstrations customers are just amazed and keep the tool. Designed with a slim shaft for the closest possible access even in hard-to-reach areas while giving great precision and comfort. The speeds available are 40,000, 50,000 or 65,000 RPM. There are multiple optional collets for smaller and metric applications. Light and durable, the **201** delivers exceptionally high torque. Ideal for fast, accurate close proximity work - from deburring, mold making and engraving at constant 65,000 RPM or polishing at 40,000 RPM. This is a friction-free motor, almost silent. A best selling favorite worldwide with vibration acceleration at only 2.2 mm/s<sup>2</sup>. See also **Model 202**.

**Model 201SV**

**0.2 hp**  
**0.15 kW**

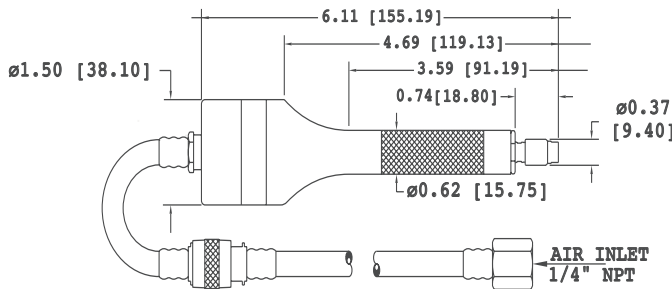

1/8"	No Brake	With Brake
Speed	Part #	Part #
40,000 rpm	32140	32144
50,000 rpm	32150	32154
65,000 rpm	32160	32164

3mm	No Brake	With Brake
Speed	Part #	Part #
40,000 rpm	32141	32145
50,000 rpm	32151	32155
65,000 rpm	32161	32165

**Weight: 6 oz/ .17 kg**

**Standard Equipment Included:** 1/8" or optional 3mm collet, collet wrenches, rear exhaust, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	201SV			
	CE	USA		MADE IN THE
Speed RPM	40,000	50,000	65,000	90,000
Power Rating HP (KW)	.15 (.11)	.2 (.15)	.2 (.15)	.2 (.15)
Inlet Air Pressure	90 PSI (6.2 Bar)			
Air Consumption-Idle cfm (L/s)	3.2 (1.51)	4 (1.88)	4 (1.88)	5 (2.36)
Air Consumption-Working cfm (L/s)	4.8 (2.22) - 7 (3.30)			
TIR Collet Held Shank	Less than .001" (.03mm)			
Sound Level	Less than 65 dBA			
Standard Shank Capacity	1/8" (3mm)			

**Accessories**

Low Flow Filter	30002
Low Flow Filter / Regulator	30001
Collet Guard	30070
Foot Pedal Control	30030

