


The popular **202** series has a larger turbine and bearing size with the same slim light pencil design as the **201**. Note: increased power from the bigger diameter turbine up to 0.55 hp for heavier material removal and heavier duty bearings. The **202** is also available at a slower speed of 30,000 RPM for polishing, 40,000 rpm or 50,000 rpm for deburring or 65,000 for metal work. Lightweight yet powerful, this tool is suitable for wide applications. The **202DM** has an automatic switch for quick, easy shut-off. No maintenance necessary. No vanes to repair or lubricate. Extremely quiet. The **202** is the natural progression for the **201DM** user who uses the tool continually or in heavier applications. See also model **205** for same slim barrel but higher power rating.

Model 202DM

0.55 hp
0.41 kW

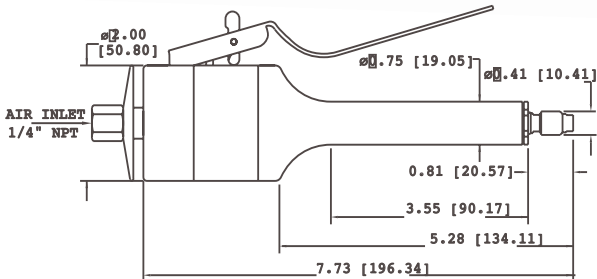

1/8"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32232	32236
40,000 rpm	32242	32246
50,000 rpm	32252	32256
65,000 rpm	32262	32266

3mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32233	32237
40,000 rpm	32243	32247
50,000 rpm	32253	32257
65,000 rpm	32263	32267

Weight: 13 oz/ .37 kg

Standard Equipment Included: 1/8" or optional 3mm collet, collet wrenches, rear exhaust, trigger switch and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	202DM			
	CE	USA		USA
Speed RPM	30,000	40,000	50,000	65,000
Power Rating HP (KW)	.4 (.30)	.45 (.34)	.5 (.37)	.55 (.41)
Inlet Air Pressure	90 PSI (6.2 Bar)			
Air Consumption-Idle cfm (L/s)	10 (4.72)	13 (6.14)	14 (6.61)	14 (6.61)
Air Consumption-Working cfm (L/s)	11 (5.19) - 20 (9.44)			
TIR Collet Held Shank	Less than .001" (.03mm)			
Sound Level	Less than 67 dBA			
Standard Shank Capacity	1/8" (3mm)			

Accessories

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30071

