
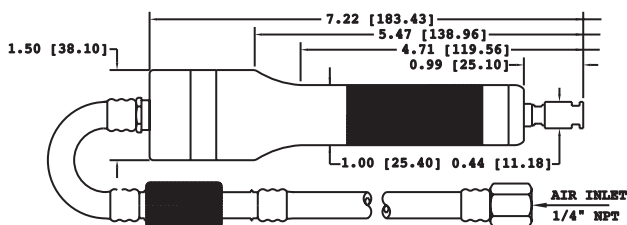


The **204X** Series can be held in the wrist or fingers for burr removal or polishing metal. The high peripheral speed does the work cleaner - only a light touch needed. This heavier duty tool features higher power at lower speeds. Power up to 0.4 hp (.30 kW) make the **204X** a powerful and light weight tool for durability in tougher applications. With low vibration, the **204X** reduces fatigue and stress injury yet increases accuracy. The compact and rugged **204X** is comfortable in use for long periods and requires no maintenance or added lubrication.

**Model 204XSV**

0.4 hp  
0.30 kW



1/8"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42632	42636
40,000 rpm	42642	42646
50,000 rpm	42652	42656

3mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42633	42637
40,000 rpm	42643	42647
50,000 rpm	42653	42657

**Weight: 8.2 oz/ .23Kg**

**Standard Equipment Included:** 1/8" or optional 3mm collet, collet wrenches, rear exhaust, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	204XSV		
	CE	USA	MADE IN THE
Speed RPM	30,000	40,000	50,000
Power Rating HP (KW)	.3 (.22)	.3 (.22)	.4 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	5 (2.36)	6 (2.83)	6 (2.83)
Air Consumption-Working cfm (L/s)	7 (3.30) - 10 (4.27)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/8" (3mm)		

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
Foot Pedal Control	30030

