


In your wrist or fingers it's so light and comfortable. The 1/4" heavy-duty **206XSV** is a powerful tool with ultra low vibration and low noise. No maintenance and no added lubrication ever. The constant high speed - within 5% of free speed at maximum power - gives you greater accuracy. No vanes to vibrate or repair. The **206XSV** has a low friction free motor with fewer moving parts. No maintenance is a big difference from vane tool technology, with a faster finer finish. At 30,000 rpm you have superb control. At 50,000 rpm you get plenty of power to match and beat other tools.

Model 206XSV

0.4 hp
30 kW



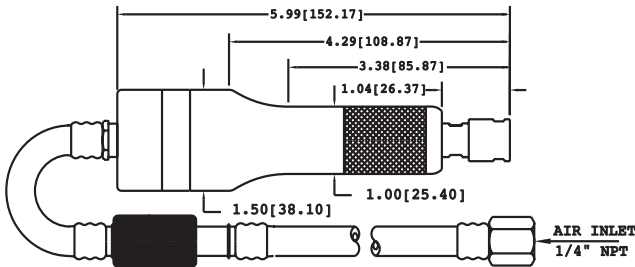

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42987	42990
40,000 rpm	42988	42991
50,000 rpm	42989	42992

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42993	42996
40,000 rpm	42994	42997
50,000 rpm	42995	42998

Weight: 8.2 oz / .23 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	206XSV  		
	30,000	40,000	50,000
Speed RPM	30,000	40,000	50,000
Power Rating HP (KW)	.2 (.15)	.3 (.22)	.4 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	5 (2.36)	6 (2.83)	6 (2.83)
Air Consumption-Working cfm (L/s)	7 (3.30) - 10 (4.27)		
TIR Collet	Less than .001" (.03 mm)		
Sound Level	Less than 67 dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
Foot Pedal Control	30030

