


With a long thin barrel for polishing, deburring, cutting in hard to reach places, the light, powerful **210DM** offers speeds of 25,000, 30,000 and 40,000 RPM. The standard collet capacities of this tool series are 1/4" or 6mm. At slower speeds the **210DM** has sufficient power to perform heavy material removal or finishing applications unsuited to our smaller, faster tools. The **210DM** is suitable for material removal at high speeds, polishing or other finishing applications. The **210DM** may be fitted to the shop's air supply assembly or our air supply assembly and has a deadman's handle for quick, easy shut-off. Vibration level is a minimal 1,9 mm/s² and noise less than 67 dBa - with no oil mist contamination or lubrication.

Model 210DM

0.88 hp
0.66 kW

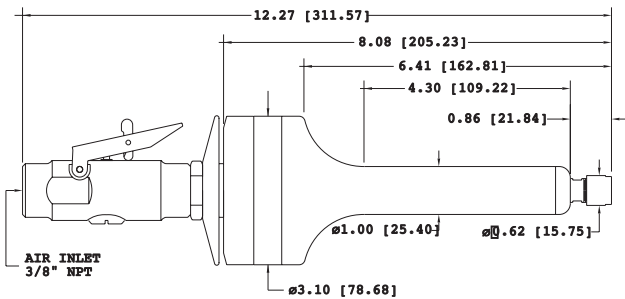

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32322	32328
30,000 rpm	32332	32338
40,000 rpm	32342	32348

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32323	32329
30,000 rpm	32333	32339
40,000 rpm	32343	32349

Weight: 32 oz / 0.9 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, trigger switch and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	210DM		
	25,000	30,000	40,000
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	.76 (.57)	.83 (.62)	.88 (.66)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	13 (6.14)	14 (6.61)	14 (6.61)
Air Consumption-Working cfm (L/s)	15 (7.08) - 35 (16.52)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
6' Air Supply Assembly	30012

