


With a long thin barrel for polishing, deburring, cutting in hard to reach places, the **210SV** offers speeds of 25,000, 30,000 and 40,000 RPM. The collet capacities of this tool series are 1/4" or 6mm. At slower speeds the **210SV** has sufficient power to perform heavy material removal or finishing applications unsuited to smaller, faster tools. The **210SV** is suitable for material removal at high speeds, polishing or other finishing applications. The **210SV** may be fitted to the shop's air supply assembly or our air supply assembly and has a quick easy shut-off conveniently located at the top of the tool. Vibration level is a minimal 1,9 mm/s² and noise less than 67 dBa. Exceptionally safe and comfortable- with no oil mist contamination or added lubrication.

Model 210SV

0.88 hp
0.66 kW

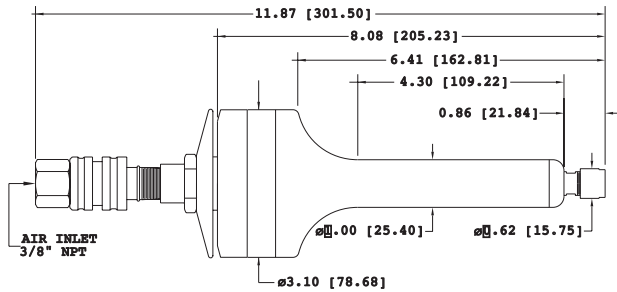

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32324	32326
30,000 rpm	32334	32336
40,000 rpm	32344	32346

6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	32325	32325
30,000 rpm	32335	32335
40,000 rpm	32345	32345

Weight: 30 oz/ .85 kg

Standard Equipment Included: 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, slide valve and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	210SV		
	CE	MADE IN THE USA	
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	.76 (.57)	.83 (.62)	.88 (.66)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	13 (6.14)	14 (6.61)	14 (6.61)
Air Consumption-Working cfm (L/s)	15 (7.08) - 35 (16.52)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

Accessories

Accessories	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
Foot Pedal Control	30030

