


Greater power for a fast cleaner precision finish with quiet no maintenance features. With up to 1.4 hp (1.04kW), the Model **230X** Series have collet capacities of 1/4" or 6mm . For use in heavy-duty applications from die finishing to slotting, plastic routing, graphite cutting and weld removal where extra power is needed this tool excels and is exceptionally comfortable for the operator. The **230XDM** is reliable due to its few moving parts and friction-free turbine motor. The **230XDM** also incorporates heavy-duty bearings within a larger, thick housing. The **230XSV** and **230XDM** may be fitted to the shop's or our air supply assembly. With our highest power rating the **230X** Series will perform heavy material removal and finishing tasks cleaner and quicker.

**Model 230XDM**



**1.4 hp**  
**1.04kW**

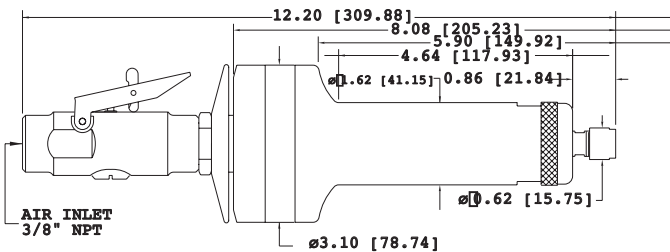

1/4"	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	42722	42728
30,000 rpm	42732	42738
40,000 rpm	42742	42748
6mm	No Brake	With Brake
Speed	Part #	Part #
25,000 rpm	42723	42729
30,000 rpm	42733	42739
40,000 rpm	42743	42749

**Weight: 39 oz / 1.07 kg**

**Standard Equipment Included:** 1/4" or optional 6mm collet, collet wrenches, rear exhaust, exhaust deflector, trigger switch and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	 <b>230XDM</b> 		
Speed RPM	25,000	30,000	40,000
Power Rating HP (KW)	1.2 (.90)	1.3 (.98)	1.4 (1.04)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	16 (7.55)	17 (8.02)	18 (8.50)
Air Consumption-Working cfm (L/s)	19 (8.97) - 30 (14.16)		
TIR Collet Held Shank	Less than .001" (.03mm)		
Sound Level	Less than 67dBa		
Standard Shank Capacity	1/4" (6mm)		

**Accessories**

High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30073
6' Air Supply Assembly	30012

