
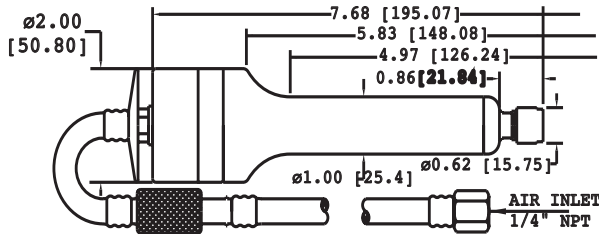


Finishing or trimming metal? Deburring aluminum or steel? The light, powerful and comfortable **525SV** "pencil" style tools have speed ranges of 30,000 and 40,000 RPM, with collet capacities of 1/4" or 6mm. The slim barrel styling provides easy access for hard-to-reach areas. Optional collets are available for varied applications. The **525SV** is equipped with a shut-off valve conveniently located on its hose. The vibration level is 1,1 mm/s<sup>2</sup> and noise level under 67 dBa. These features dramatically reduce operator fatigue and risk of injury.

**Model 525SV**

0.45 hp

0.34 kW

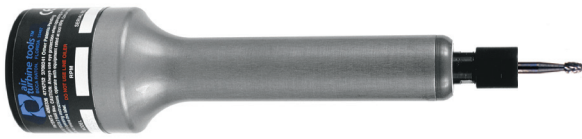



1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32530	32534
40,000 rpm	32540	32544

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	32531	32535
40,000 rpm	32541	32545

**Weight: 14.5 oz/ .4 kg**

**Standard Equipment Included:** 1/4" or optional 6mm collet, collet wrenches, rear exhaust, 5' air supply assembly with slide valve and 1/4" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

General Specifications	525SV  	
	Speed RPM	30,000
Power Rating HP (KW)	.4 (.30)	.45 (.34)
Inlet Air Pressure	90 PSI (6.2 Bar)	
Air Consumption-Idle cfm (L/s)	10 (4.72)	13 (6.14)
Air Consumption-Working cfm (L/s)	11 (5.19) - 20 (9.27)	
TIR Collet Held Shank	Less than .001" (.03mm)	
Sound Level	Less than 67dBa	
Standard Shank Capacity	1/4" (6mm)	

**Accessories**

	Part#
High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
Foot Pedal Control	30030

