




Exceptionally powerful and tough! The **525XDM** delivers extra power at lower speeds. Double turbine power combines with lightweight, low vibration and noise. Unique operator comfort combined with greater accuracy add a finer high speed finish. The constant high speed **525XDM** enables you to work on hard-to-reach applications for fast removal or finishing - comfortably with a light touch directing the tool. Air turbine tools® oil free mechanism eliminates carcinogenic, corrosive oil contamination and lubrication costs. With fewer moving parts there is no maintenance and repair costs are reduced.

### Model 525XDM

0.9 hp  
0.68 kW

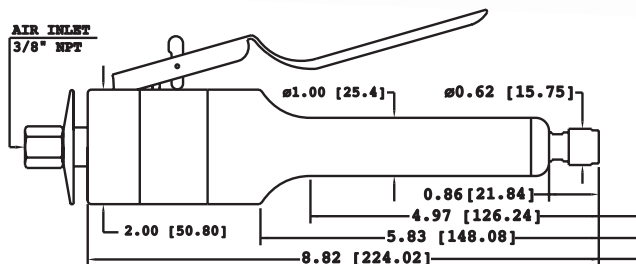

General Specifications	 <b>525XDM</b> 	
	Speed RPM	30,000
Power Rating HP (KW)	.8 (.60)	.9 (.68)
Inlet Air Pressure	90 PSI (6.2 Bar)	
Air Consumption-Idle cfm (L/s)	19 (8.97)	20 (9.44)
Air Consumption-Working cfm (L/s)	22 (10.38) - 30 (14.16)	
TIR Collet Held Shank	Less than .001" (.03mm)	
Sound Level	Less than 67dBa	
Standard Shank Capacity	1/4" (6mm)	

1/4"	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42532	42536
40,000 rpm	42542	42546

6mm	No Brake	With Brake
Speed	Part #	Part #
30,000 rpm	42533	42537
40,000 rpm	42543	42547

**Weight: 20.5 oz / .58 kg**

**Standard Equipment Included:** 1/4" or optional 6mm collet, collet wrenches, rear exhaust, trigger switch and 3/8" NPT air supply fitting. Oil free 90 psi / 6.2 bar dry, clean air supply required.

### Accessories

High Flow Filter	30004
High Flow Filter / Regulator	30003
Collet Guard	30072
5' Air Supply Assembly	30020

