
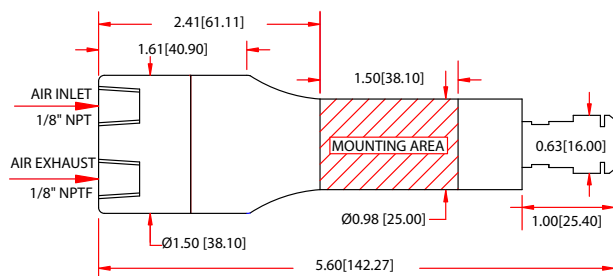


Ideal for lab mills, lathes and swiss automation, and all fixture and robotic applications. Reach deep and run faster for accelerated production and cleaner cutting action. Lower vibration results from fewer moving parts in this direct drive, oil free geared double turbine powered unit. Mountable area of 25mm by 38mm.

Model 701MX

0.40 hp
0.30 kW

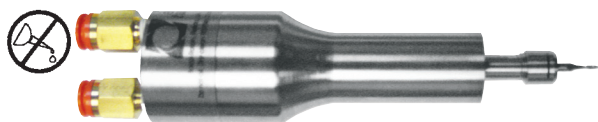

ER-8

1/8"		3mm	
Speed	Part #	Speed	Part #
40,000 rpm	70012	40,000 rpm	70013
50,000 rpm	70016	50,000 rpm	70017
65,000 rpm	70020	65,000 rpm	70021

ER-11

1/4"		6mm	
Speed	Part #	Speed	Part #
40,000 rpm	70014	40,000 rpm	70015
50,000 rpm	70018	50,000 rpm	70019
65,000 rpm	70022	65,000 rpm	70023

Weight: 25 oz / 0.71 kg

General Specifications	701MX		
	CE	USA	USA
Speed RPM	40,000	50,000	65,000
Power Rating HP (KW)	.30 (.22)	.30 (.22)	.40 (.30)
Inlet Air Pressure	90 PSI (6.2 Bar)		
Air Consumption-Idle cfm (L/s)	5 (2.36)	6 (2.83)	6 (2.83)
Air Consumption-Working cfm (L/s)	7 (3.30) - 10 (4.72)		
TIR Collet Held Shank	0.0002" (0.005mm)		
Sound Level	Less Than 67 dBa		
Standard Shank Capacity	1/8" (3mm) or 1/4" (6mm)		

Standard Equipment: ER-8 or ER-11 Collet System, Keys, Wrenches, included in a carrying case. 1/8", 3mm, 1/4" or 6mm collet, Oil free 90 psi/6.2 bar dry, clean air supply required.

Accessories **Part#**
High Flow Filter / Regulator /
Extractor 30008